
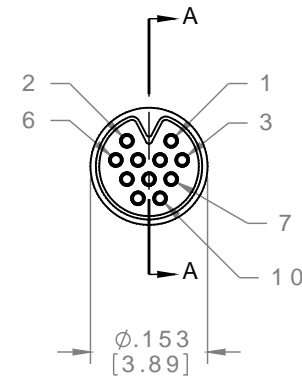
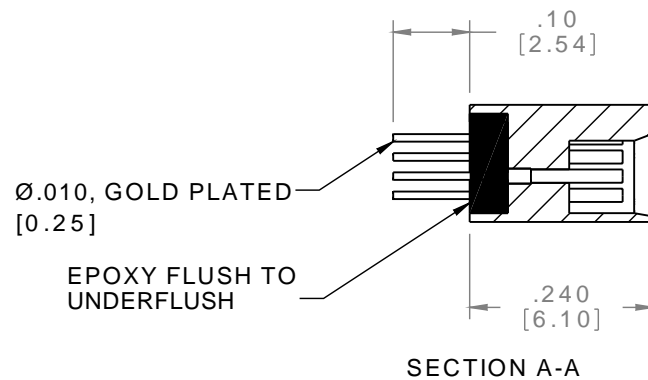
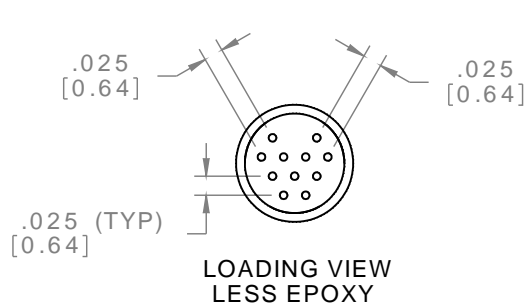


MATERIALS & SPECIFICATIONS

PART NO.	A 79111-001	REV	ECO	DATE	APP
		D	98556	05-18-12	TLM

- INSULATOR MATERIAL:**
THERMOPLASTIC POLYMER PER MIL-DTL-32139
- CONTACT MATERIAL:**
COPPER ALLOY PER MIL-DTL-32139. GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27
- TERMINATION:**
GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27
- CURRENT CAPACITY:**
1 AMP MAX PER MIL-DTL-32139
- CONTACT RESISTANCE:**
71 MILLIOHMS (71 mV) MAX @ 1.0 AMPS PER MIL-DTL-32139

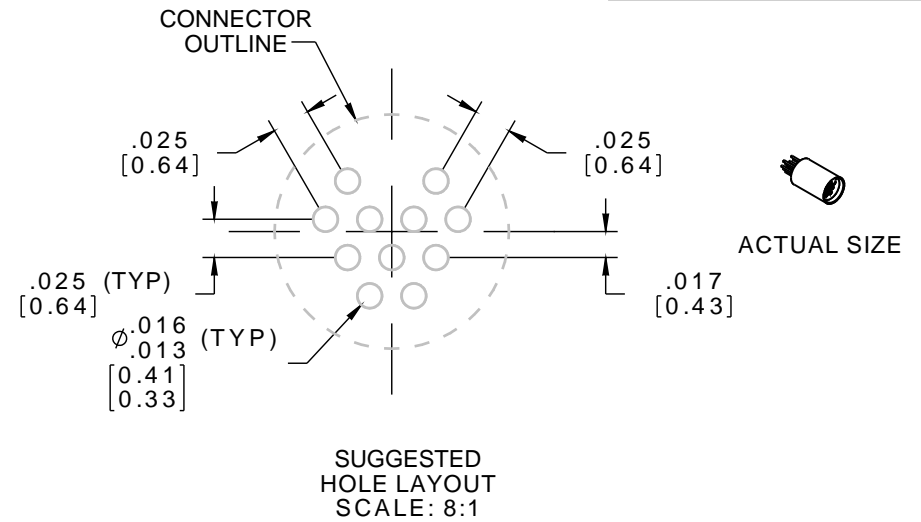

RoHS

NCS SLDW	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		 OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873		
	-TOLERANCES-	DFTM. ACM	DATE		TITLE:	DWG NO.	
	UNLESS OTHERWISE NOTED	CHK'D.	DATE		(11) SOCKET FEMALE	A 79111-001	
	DIMENSIONS IN INCHES	APP'D.	DATE		NANO CIRCULAR	SHEET 1 OF 1	
2 PL DEC ± .01			CONNECTOR	REV			
3 PL DEC ± .005				D			
4 PL DEC ± .0005				SCALE: 4:1			
ANGLES ± 1°							